

SlideWinder

Simple. Reliable. Secure.



RESIDENTIAL COMMERCIAL SLIDE GATE OPERATOR

ELEGANT STAINLESS STEEL CABLE DRIVE

No more rusty, ugly, dangling, grimy, open-to-the-elements chain that jerks your gate open and closed.

WHISPER QUIET

Install SlideWinder close to living spaces. SlideWinder is as quiet as they come.

UPS BACKUP*

SlideWinder's unique UPS battery backup virtually guarantees that your gate operates normally (with access controls and safety equipment fully operational) when the power goes down.

*uninterruptible power supply

ULTRA RELIABLE

SlideWinder comes with a 5 year limited warranty. It's rated for continuous duty. It meets the HySecurity standard of highest quality and reliability. Users can expect years of low maintenance, ultra-reliable service from SlideWinder and all HySecurity operators.

w/12" base riser



standard model



SlideWinder 24
1/2 hp
125 lb. pull force
1,200 lb. max gate weight
24' max gate travel
UL Class I - IV
115/208-230 single phase
50 or 60 Hz



SlideWinder 38
1 hp
200 lb. pull force
2,000 lb. max gate weight
38' max gate travel
UL Class I - IV
115/208-230 single phase
50 or 60 Hz

Available May, 2004; Call your distributor.

www.hysecurity.com / 1-800-321-9947 / fax: 1-888-321-9946 / info@hysecurity.com


SlideWinder Specifications

Benefits & Features

1. Unique for a reason Specifiable as a clearly better product
2. Simple and fast to install..... User and installer friendly
3. Sensitive & adaptive inherent sensor A very safe gate operator
4. Attractive profile and color User / installer appeal
5. Even looks good on the inside..... Easy to service
6. Unique cable winch design Looks elegant / smooth operation / low maint.
7. Equipped with the Smart Touch Controller More control options than any other operator
8. UPS is standard equip..... Fewer options to consider and pay for
9. Our battery provides accessory power..... UPS for access controls 24DC std 12DC opt
10. Battery allows use of all std. control features True UPS gate drive – not just AC loss open
11. Battery back-up lasts for many cycles More features, larger batteries + solar option
12. Perfect start & stop for all gates Gentle on gate hardware / no banging
13. Three-phase drive down technology Precisely control gate stops with no adj.
14. Inherent sensing of speed and current..... Better inherent reversing sensor
15. Electronic locking..... Totally secure without a lock or latch
16. Automatic unlocking..... Push gate open after turning off DC power
17. Simple & reliable mechanism Long life & very little maintenance
18. Many other important features
 - a. Very quiet..... Great for residential use
 - b. Complete choice of control options Installer adaptable to users needs
 - c. Electronic limits..... Program once, never adjust again
 - d. No DC motor..... No brushes to fail, no maintenance
 - e. Low starting current..... No need for large branch supply wires
 - f. Listed to UL 325 Fully compliant with latest safety standards



Conduit Locations

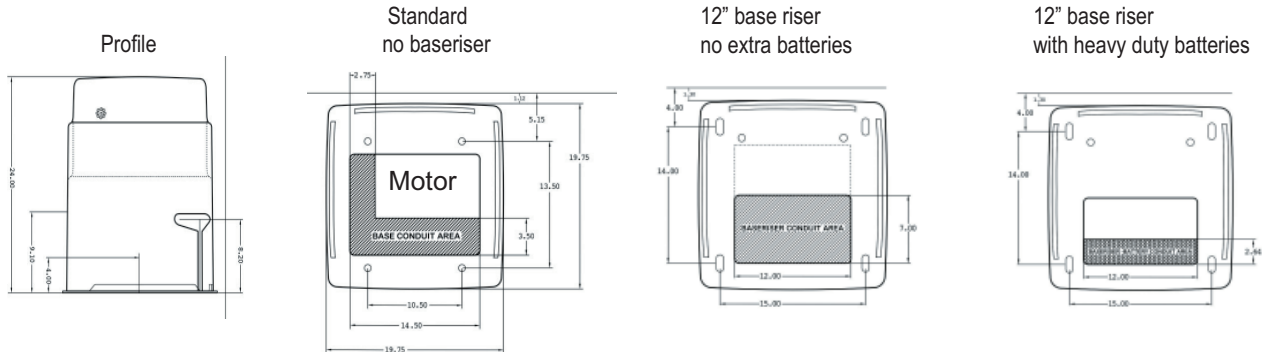

Future Models

| | | | | |
|-------------------|-----------|-------|--|--|
| SlideWinder 24F | Fast | | Installer adjustable variable speed version up to 2'/sec. of SlideWinder 24. | UL Class I-IV for speeds up to 1'/sec.; UL Class III-IV for speeds above 1'/sec. |
| SlideWinder 24S | | Solar | Solar powered version of SlideWinder 24. | UL Class I-IV |
| SlideWinder 24FS | Fast | Solar | Fast (up to 2'/sec.) solar powered version of SlideWinder 24F. | UL Class I-IV for speeds up to 1'/sec.; UL Class III-IV for speeds above 1'/sec. |
| SlideWinder 38F | Fast | | Installer adjustable variable speed version up to 2'/sec. of SlideWinder 38. | UL Class I-IV for speeds up to 1'/sec.; UL Class III-IV for speeds above 1'/sec. |
| SlideWinder 38VF | Very Fast | | Installer adjustable variable speed version (up to 3'/sec.) of SlideWinder 38. | UL Class I-IV for speeds up to 1'/sec.; UL Class III-IV for speeds above 1'/sec. |
| SlideWinder 38S | | Solar | Solar powered version of SlideWinder 38. | UL Class I-IV |
| SlideWinder 38FS | Fast | Solar | Fast (up to 2'/sec.) solar powered version of SlideWinder 38F. | UL Class I-IV for speeds up to 1'/sec.; UL Class III-IV for speeds above 1'/sec. |
| SlideWinder 38FVS | Very Fast | Solar | Very fast (up to 3'/sec. solar powered version of SlideWinder 38. | UL Class I-IV for speeds up to 1'/sec.; UL Class III-IV for speeds above 1'/sec. |



"HySecurity has extended its experience designing and manufacturing high quality hydraulic gate operators to an electro-mechanical operator that is simple, reliable and secure . . . and also elegant. We include features that really matter and offer a clear improvement over currently available electro-mechanical operators. SlideWinder is a departure and improvement over commonplace operators typically used in residential and commercial applications." Brian DeNault, CEO HySecurity